


# Cummins Southeastern Power, Inc.

V504M

# Turbo 240 Marine Diesel

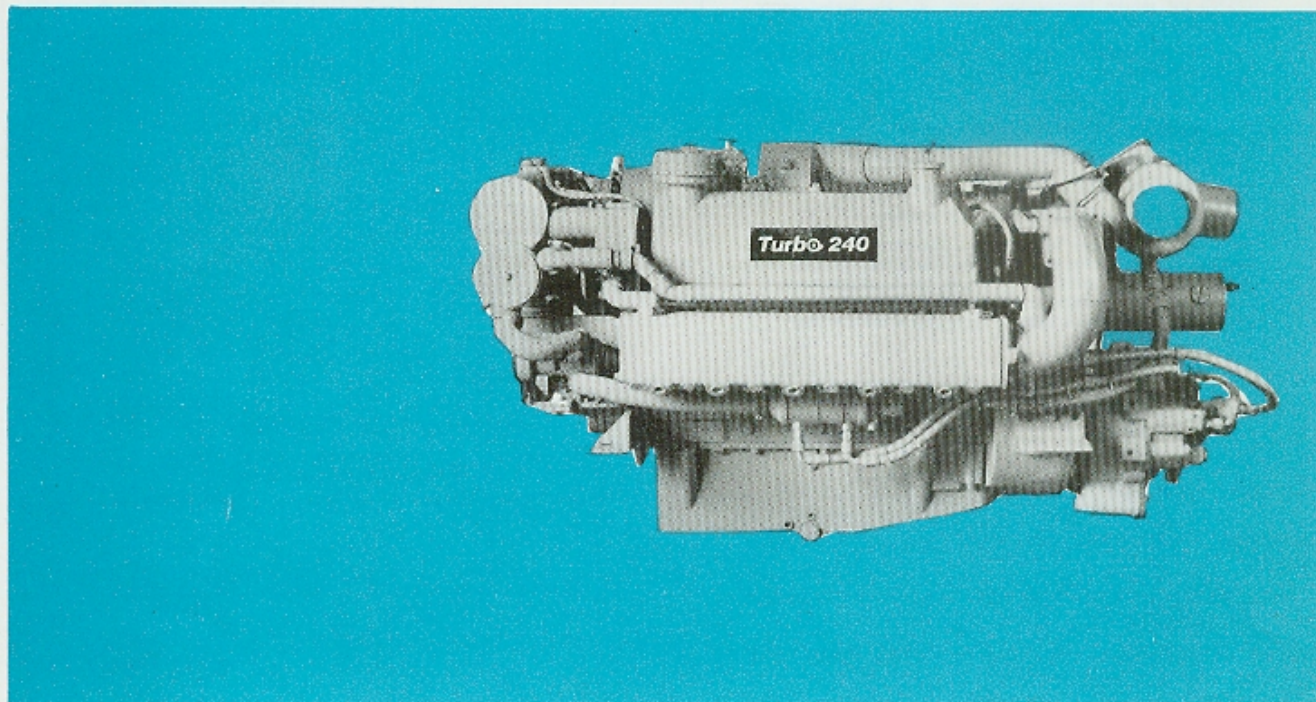

## Specifications

### Power Rating

Maximum ..... 240 bhp  
Rated RPM ..... 3000

Four Stroke Cycle, Turbocharged,  
V8 Diesel Engine.

Bore and Stroke ..... 4 $\frac{1}{8}$  x 3 $\frac{3}{4}$  in.  
Displacement ..... 504 cu. in.  
Oil Pan Capacity ..... 5 U.S. gals.  
Net Weight, Dry† ..... 1870 lbs.

†With selected accessories and Twin Disc MG-502 gear.

Optional Borg-Warner and Newage Gears; and instrument panels are available.

## Standard Equipment

**Accessory Drive:** Single-groove front accessory drive pulley.

**Air Intake System:** Mounted air intake silencer.

**Alternator:** 12 volt 60 amp negative ground system.

**Cooling System:** Mounted engine heat exchanger with copper-nickel tube bundle. Gear oil cooler mounted in raw water system. Self priming raw water pump belt driven.

**Electrical Accessories:** Starter relay and key switches, low oil pressure and high water temperature alarm switches.

**Engine Support:** Marine type, 22 $\frac{1}{2}$  inch mounting centers. Adjustable vibration isolators.

**Exhaust Accessories:** Raw water cooled exhaust riser. Holset A2C turbocharger with Hitco heat blanket.

**Flywheel Housing and Flywheel:** SAE 3 with 11 $\frac{1}{2}$  inch O.C. clutch adaptation.

**Filters:** Spin-on fuel and water filters. Full-flow lubricating oil filter supplied for customer mounting.

**Oil Dipstick:** Port or starboard side.

**Oil Drain Accessories:** Mounted suction hose.

**Starter:** 12 volt, with high mounting arrangement.

