
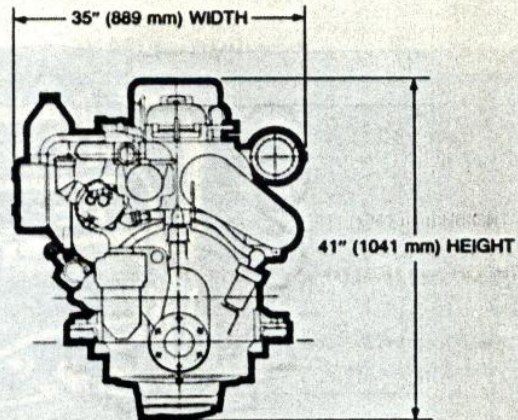


principal dimensions

MODEL 1042-5000

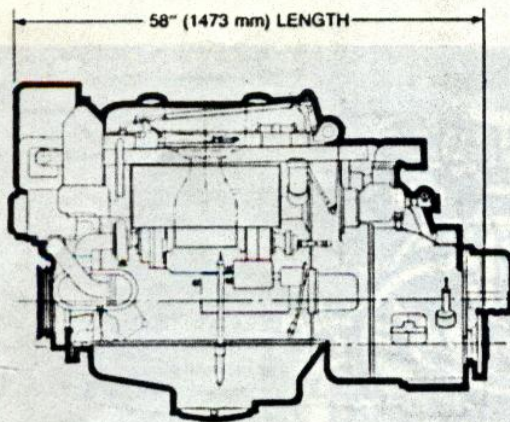

For complete dimensional information, refer to installation drawing 2SA256 for model 1042-5000 and 2SA260 for model 1042-3000

standard equipment

Air Box Drain Tube

Air Silencer

Alternator—12-volt, 42 amp

Cast Aluminum Rocker Cover

Crankshaft Pulley

Engine Mounts—Includes mounts for engine and marine gear

Exhaust Manifold—Water-cooled

Flywheel Housing—SAE #2

Governor—Variable speed, includes throttle controls

Heat Exchanger—Includes raw water pump and piping

Instruments—Includes ammeter, hourmeter, tachometer, water temperature gauge, and oil pressure gauges for engine and marine gear

Lube Oil Cooler

Lube Oil Filter—Full-flow filter

Marine Gear—Allison "M" type hydraulic reverse and reduction gear, 2 to 1 ratio

Oil Pan and Distribution System—Cast oil pan for 30° installation angle, center sump

Starting Motor—12 volt

Water Filter—Fresh water filter with 10-gallon (37.9 litres) capacity

For complete specifications and a listing of standard and optional equipment, consult your authorized Detroit Diesel Allison Representative

Specifications subject to change without notice



Detroit Diesel Allison
Division of General Motors Corporation

13400 West Outer Drive, Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London, Ontario