



## 8V-92


**MODEL 8V-92  
MARINE CONTINUOUS RATING  
9275 INJECTORS\***

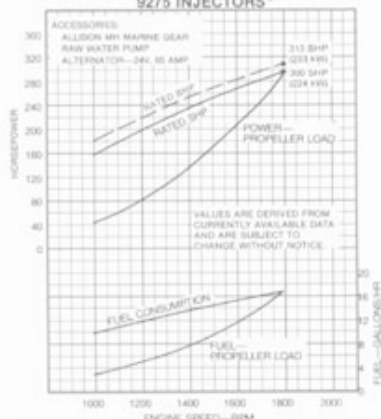

**MODEL 8V-92  
MARINE INTERMITTENT RATING  
9280 INJECTORS\***

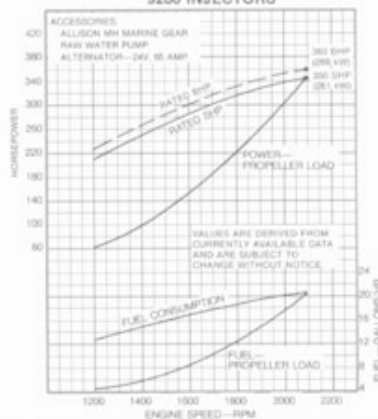


**MODEL 8V-92  
MARINE MAXIMUM RATING  
9285 INJECTORS\***

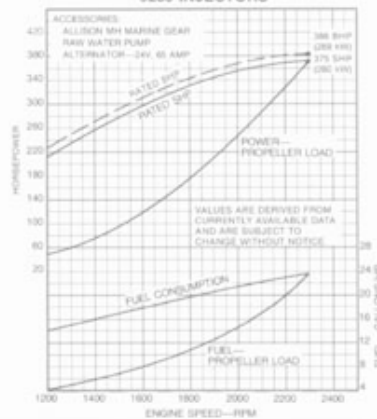


## 8V-92TI Low Profile (Allison MH Marine Gear)


**MODEL 8V-92TI  
MARINE INTERMITTENT RATING  
9290 INJECTORS†**

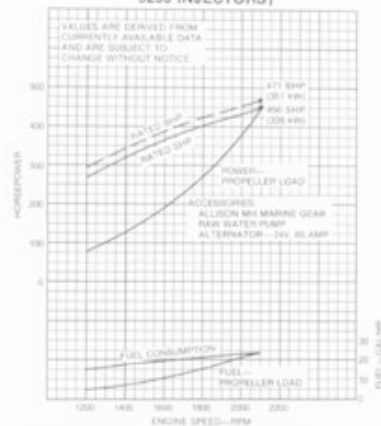

**MODEL 8V-92TI  
MARINE MAXIMUM RATING  
9215 INJECTORS†**

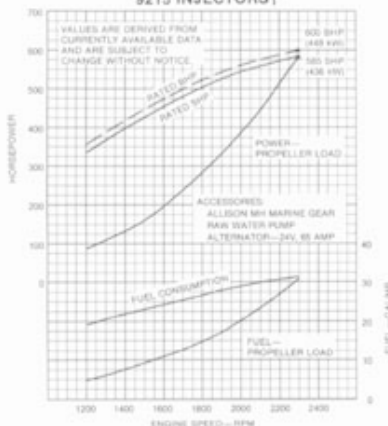


**MODEL 8V-92TI  
MARINE MAXIMUM RATING  
WITH 9215 INJECTORS†**

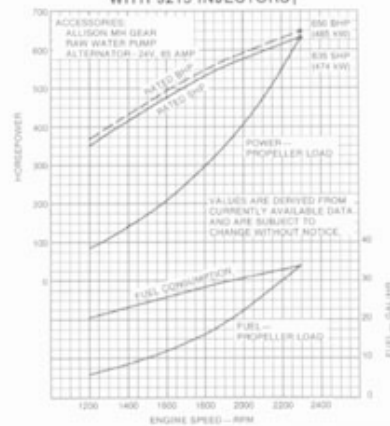


## 8V-92TI Low Profile (Twin Disc 514 Marine Gear)

**MODEL 8V-92TI  
MARINE INTERMITTENT RATING  
9290 INJECTORS†**

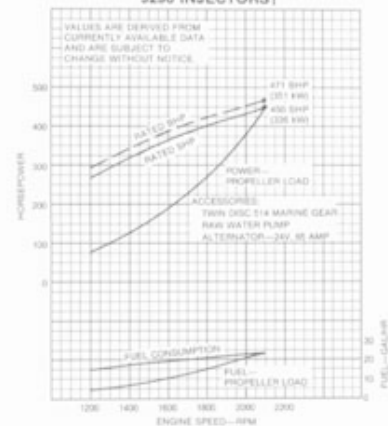

**MODEL 8V-92TI  
MARINE MAXIMUM RATING  
9225 INJECTORS†**

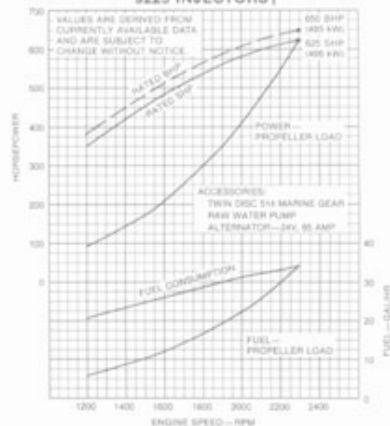

No continuous rating is currently available for the 8V-92TI

### Rating Explanation

**RATED BHP**—Basic engine gross horsepower.  
**RATED SHP**—Net power available at the marine gear output shaft.  
**PROPELLER LOAD**—Indicates horsepower absorbed by a typical propeller and the corresponding fuel consumption throughout the speed range.  
**POWER OUTPUT** guaranteed within 5%

at standard ambient conditions.  
**MARINE ENGINE RATING**—The use of the ratings e.g., maximum, intermittent and continuous; varies with type of vessel in which the engine is installed. See your Detroit Diesel Allison representative for the rating

that will apply to your vessel.  
\*Rating conditions of 85°F (29.4°C) and 29.00 in Hg (98.19 kPa) Barometer (Dry)  
†Rating conditions of SAE: 77°F (25°C) and 29.31 in Hg (99 kPa) Barometer (Dry)

