


**DIMENSIONS**

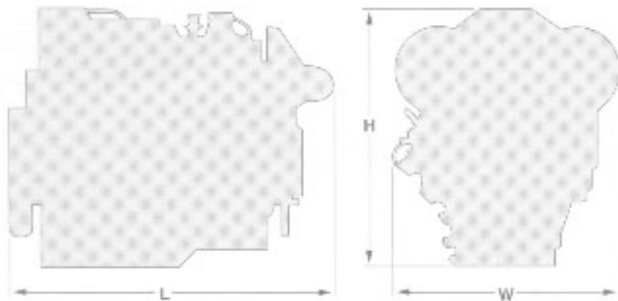

L		H		W	
mm	in	mm	in	mm	in
1468	58	1376	52	1354	53

**STANDARD EQUIPMENT**

- Air Intake –  
single-stage, dry type
- Cooling –  
low profile expansion tank, jacket water and sea water pumps, outlet regulated thermostats, lube oil cooler
- Exhaust –  
fresh watercooled exhaust manifold and turbo
- Flywheel and flywheel housing –  
SAE No. 1
- Fuel System –  
priming and transfer pumps, filter, flexible lines
- Governor –  
electronic
- Instruments and gauges –  
premium panel with oil pressure, coolant temperature, fuel pressure gauges, tachometer drive
- Jacket water heaters
- Lubricating system –  
oil pump, oil filters, dipstick
- Manual Air Shutoff
- Protection devices –  
coolant temperature, oil pressure, coolant level

**ACCESSORY EQUIPMENT**

- Alternator
- Alternator guard
- Damper guard
- Double sheave pulley
- Electronic pilot house gauge panel
- Fuel –  
primary filter
- Power takeoffs –  
auxiliary drive, hydraulic pump drives, air compressor and drives
- Starting –  
electric

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.

LEHM3291 (5-93)  
Supersedes LEHM2059

© 1993 Caterpillar

Printed in U.S.A.