


DIMENSIONS

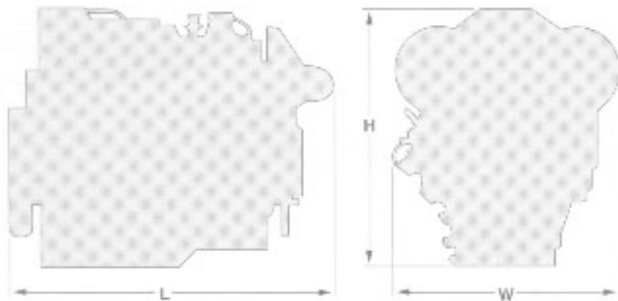

L		H		W	
mm	in	mm	in	mm	in
1468	58	1376	52	1354	53

STANDARD EQUIPMENT

- Air Intake –
single-stage, dry type
- Cooling –
low profile expansion tank, jacket water and sea water pumps, outlet regulated thermostats, lube oil cooler
- Exhaust –
fresh watercooled exhaust manifold and turbo
- Flywheel and flywheel housing –
SAE No. 1
- Fuel System –
priming and transfer pumps, filter, flexible lines
- Governor –
electronic
- Instruments and gauges –
premium panel with oil pressure, coolant temperature, fuel pressure gauges, tachometer drive
- Jacket water heaters
- Lubricating system –
oil pump, oil filters, dipstick
- Manual Air Shutoff
- Protection devices –
coolant temperature, oil pressure, coolant level

ACCESSORY EQUIPMENT

- Alternator
- Alternator guard
- Damper guard
- Double sheave pulley
- Electronic pilot house gauge panel
- Fuel –
primary filter
- Power takeoffs –
auxiliary drive, hydraulic pump drives, air compressor and drives
- Starting –
electric

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.

LEHM3291 (5-93)
Supersedes LEHM2059

© 1993 Caterpillar

Printed in U.S.A.