


**DIMENSIONS**

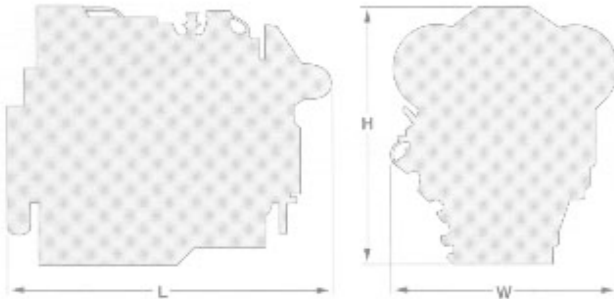

L		H		W	
mm	in	mm	in	mm	in
1468	58	1376	52	1354	53

**STANDARD EQUIPMENT**

- Air Intake – single-stage, dry type
- Cooling – low profile expansion tank, jacket water and sea water pumps, outlet regulated thermostats, lube oil cooler
- Exhaust – fresh watercooled exhaust manifold and turbo
- Flywheel and flywheel housing – SAE No. 1
- Fuel System – priming and transfer pumps, filter, flexible lines
- Governor – electronic
- Instruments and gauges – premium panel with oil pressure, coolant temperature, fuel pressure gauges, tachometer drive
- Jacket water heaters
- Lubricating system – oil pump, oil filters, dipstick
- Manual Air Shutoff
- Protection devices – coolant temperature, oil pressure, coolant level

**ACCESSORY EQUIPMENT**

- Alternator
- Alternator guard
- Damper guard
- Double sheave pulley
- Electronic pilot house gauge panel
- Fuel – primary filter
- Power takeoffs – auxiliary drive, hydraulic pump drives, air compressor and drives
- Starting – electric

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.

LEHM3291 (5-93)  
Supersedes LEHM2059

© 1993 Caterpillar

Printed in U.S.A.