

## SPECIFICATIONS


### 220B

Crankshaft power <sup>1</sup>	162 kW	220 hp, metric
Crankshaft power <sup>2</sup>	157 kW	210 bhp
Rated speed	2600 rpm	2600 rpm
Bore x stroke	102x120 mm	4.02x4.72 in
Displacement	5.9 liters	359 cu in
Aspiration	Turbocharged	Turbocharged
Number of cylinders	6	6
Engine weight without gear	508 kg	1,120 lb

#### Dimensions without gear

Length	1033.5 mm	40.69 in
Width	763.0 mm	30.04 in
Height	778.9 mm	30.66 in

Fuel consumption	Prop hp	
	liters per hour	gallons per hour
2600 rpm	42.3	11.2
2400 rpm	34.1	9.0
2200 rpm	26.5	7.0
2000 rpm	20.1	5.3
1800 rpm	14.8	3.9
1500 rpm	9.1	2.4
1200 rpm	5.7	1.5

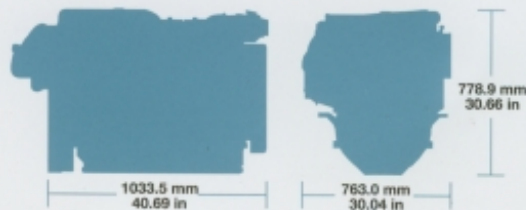


### 270B

Crankshaft power <sup>1</sup>	199 kW	270 hp, metric
Crankshaft power <sup>2</sup>	194 kW	260 bhp
Rated speed	2600 rpm	2600 rpm
Bore x stroke	102x120 mm	4.02x4.72 in
Displacement	5.9 liters	359 cu in
Aspiration	Turbocharged/ Aftercooled	Turbocharged/ Aftercooled
Number of cylinders	6	6
Engine weight without gear	513 kg	1,130 lb

#### Dimensions without gear

Length	1028.1 mm	40.48 in
Width	825.9 mm	32.52 in
Height	837.2 mm	32.96 in

Fuel consumption	Prop hp	
	liters per hour	gallons per hour
2600 rpm	53.7	14.2
2400 rpm	40.5	10.7
2200 rpm	31.8	8.4
2000 rpm	24.2	6.4
1800 rpm	18.5	4.9
1600 rpm	14.0	3.7
1400 rpm	10.2	2.7
1200 rpm	6.8	1.8

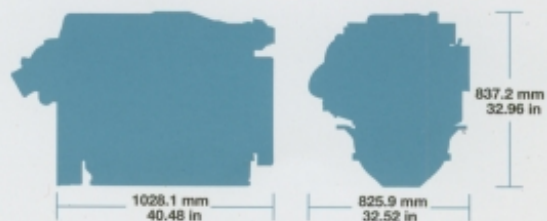

<sup>1</sup> Technical data according to ISO 3046 fuel stop power. Fuel 25°C (77°F).

<sup>2</sup> Technical data according to ISO 8685 fuel stop power. Fuel 40°C (104°F). Power rated in accordance with IMCI procedures.