


principal dimensions

5062-7000

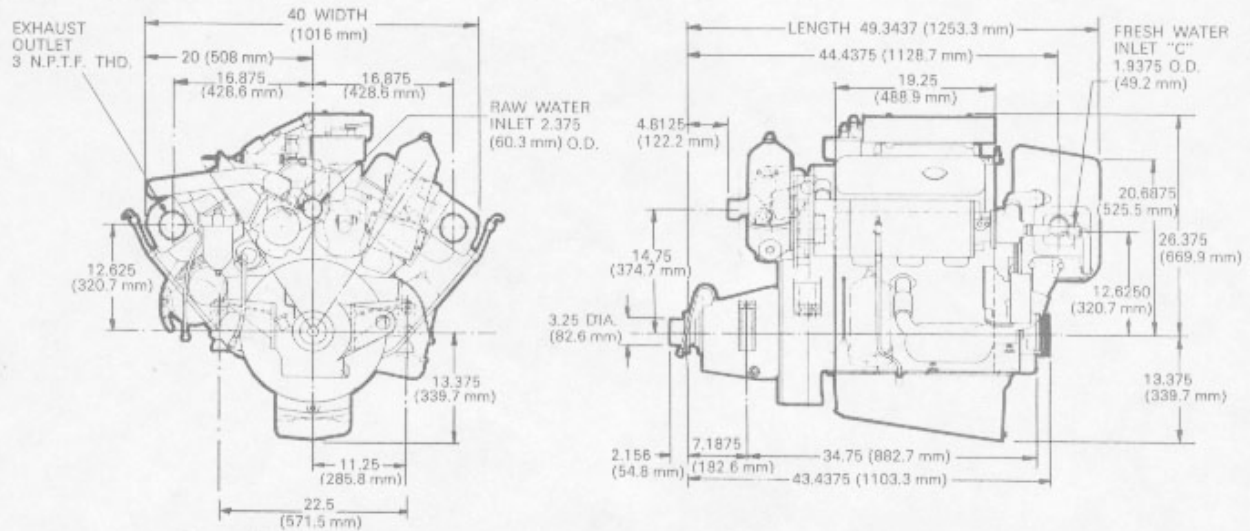

For complete dimensional information for Model 5062-3000 and 5062-7000 refer to installation drawing 2SA 283.

standard equipment

Air Inlet Housing—Aluminum housing with manual air shutdown. Includes air silencer

Crankshaft Pulley—5.38 in. (136.7 mm) diameter, 2-groove

Engine Mounts—Includes mounts for engine and marine gear

Exhaust Manifold—Water-cooled

Flywheel Housing—SAE #3

Generator—Battery-charging, 12 volt, 25 amp, DC

Governor—Variable speed, includes throttle controls

Heat Exchanger—Includes raw water pump and piping

Injectors—Cam-operated, unit type

Lube Oil Filter—Full-flow filter

Marine Gear—Warner hydraulic reverse and direct drive gear, 1 to 1 ratio

Oil Pan and Distribution System—Cast iron oil pan for 0 - 17 degree installation angle

Starting Equipment—12 volt, sprag over-running clutch

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice



Detroit Diesel Allison
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited London Ontario

