


principal dimensions

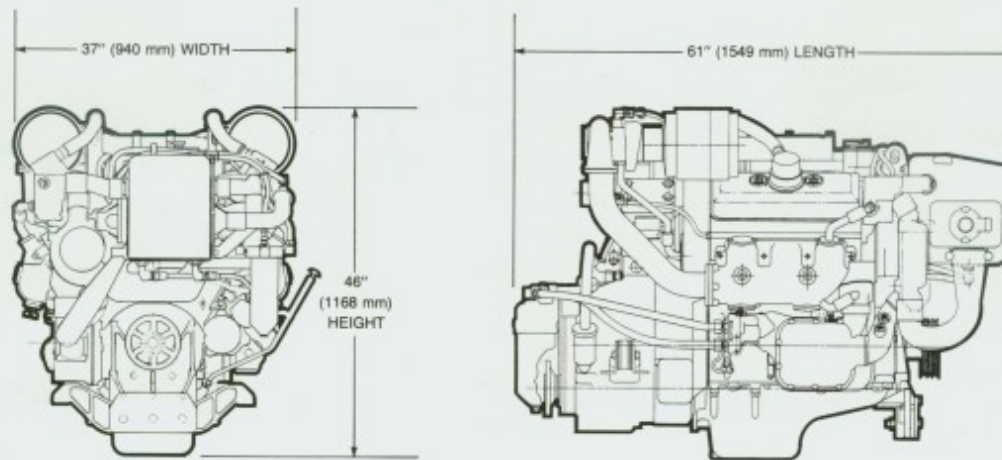

For complete dimensional information, refer to installation drawing.

standard equipment

Air Inlet Housing

Air Silencers

Alternator—14 volt, 75 amp (for nominal 12 volt charging system)

Crankshaft Pulley

Engine Mounts—Resilient mounts for engine and marine gear

Exhaust Manifold—Water-cooled

Flywheel Housing—SAE #2

Fuel Filters

Governor—Variable speed

Heat Exchanger—Includes raw water pump and piping

Injectors—Cam operated, unit type, clean tip

Lube Oil Cooler

Lube Oil Filter—Full-flow

Marine Gear—Allison "M" type hydraulic reverse and reduction gear, 2 to 1 ratio

Oil Pan and Distribution System—Cast iron oil pan for 0-15° inclination angle, rear sump

Starting Motor—12 volt, high output

Turbochargers

Water Filter—Fresh water filter with 30-gallon (113.6 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



Detroit Diesel Allison
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London Ontario

4SA105 7-78

Litho in U.S.A.