


## principal dimensions

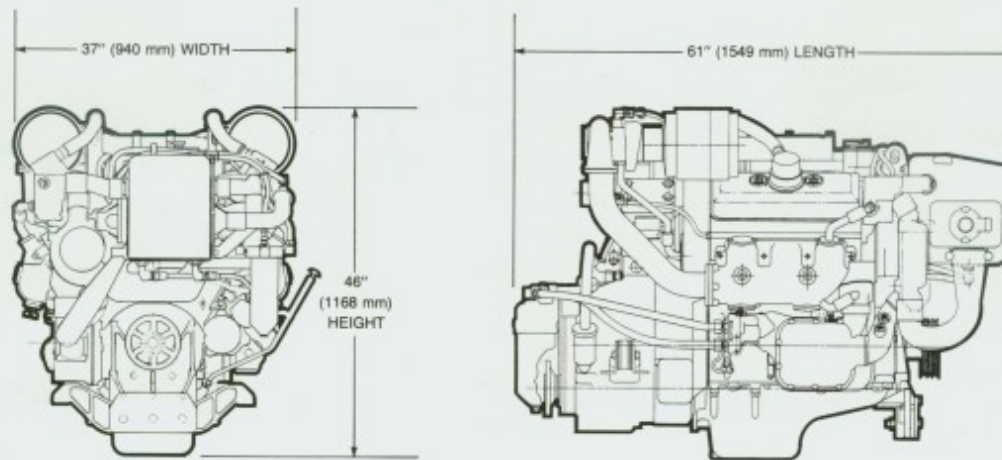

For complete dimensional information, refer to installation drawing.

## standard equipment

### Air Inlet Housing

### Air Silencers

**Alternator**—14 volt, 75 amp (for nominal 12 volt charging system)

### Crankshaft Pulley

**Engine Mounts**—Resilient mounts for engine and marine gear

**Exhaust Manifold**—Water-cooled

**Flywheel Housing**—SAE #2

### Fuel Filters

**Governor**—Variable speed

**Heat Exchanger**—Includes raw water pump and piping

**Injectors**—Cam operated, unit type, clean tip

### Lube Oil Cooler

**Lube Oil Filter**—Full-flow

**Marine Gear**—Allison "M" type hydraulic reverse and reduction gear, 2 to 1 ratio

**Oil Pan and Distribution System**—Cast iron oil pan for 0-15° inclination angle, rear sump

**Starting Motor**—12 volt, high output

### Turbochargers

**Water Filter**—Fresh water filter with 30-gallon (113.6 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



**Detroit Diesel Allison**  
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London Ontario

4SA105 7-78

Litho in U.S.A.