


principal dimensions

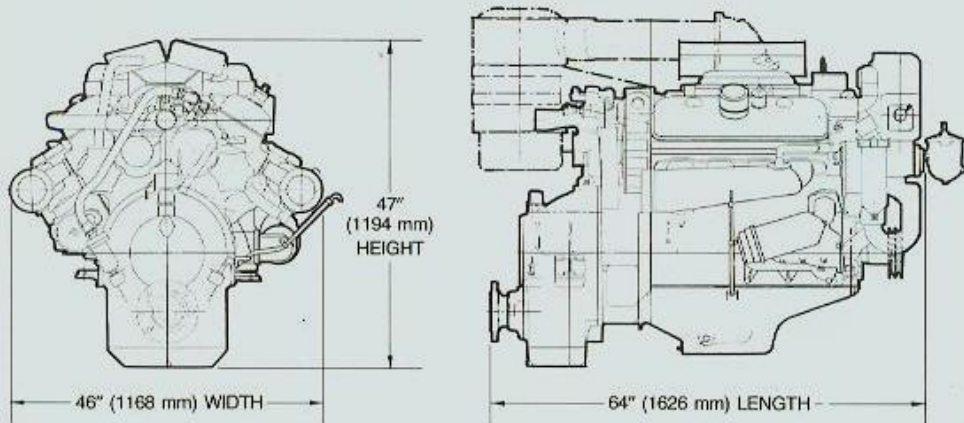

For complete dimensional information, refer to installation drawing 2SA235.

standard equipment

Air Inlet Housing

Air Silencers

Alternator—24 volt, 65 amp

Crankshaft Pulley

Engine Mounts—Includes mounts for engine and marine gear

Exhaust Manifold—Water-cooled with flange

Flywheel Housing—SAE #2

Governor—Variable speed, with throttle controls

Heat Exchanger—Includes raw water pump and piping

Instruments—Includes ammeter, tachometer, water temperature gauge, oil pressure gauges for engine and reverse gear

Lube Oil Cooler

Lube Oil Filter—Full-flow filter

Marine Gear—Allison MH Hydraulic reverse and reduction gear: 1.97 to 1 ratio

Oil Pan and Distribution System—For 0°-15° degree installation angle

Starting Motor—24 volt

Water Filter—Fresh water filter with 30-gallon (113.6 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



Detroit Diesel Allison
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London Ontario

