


principal dimensions

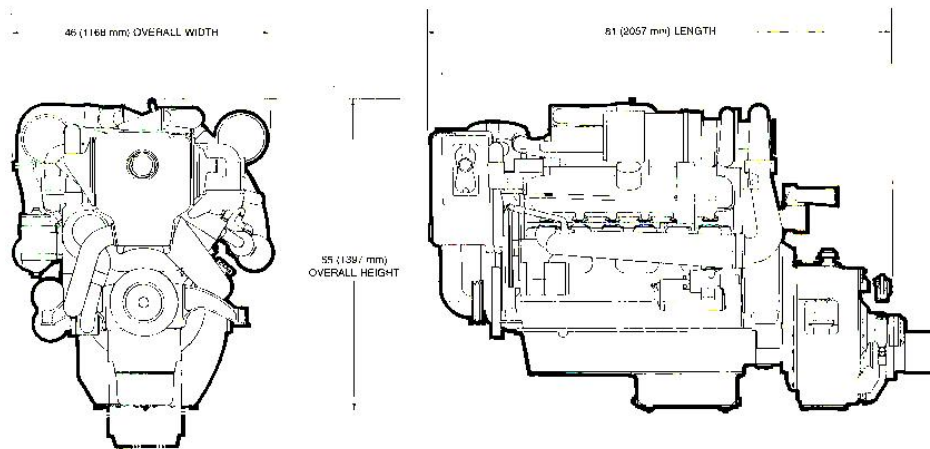

For complete dimensional information, refer to installation drawing 2SA367.

standard equipment

Air Box Drain Tubes

Air Inlet Housing

Air Silencers

Alternator—24 v, 65 amp

Cast Aluminum Rocker Covers

Crankshaft Pulley

Engine Mounts—Includes mounts for engine and marine gear

Exhaust Manifold—Water-cooled

Flywheel Housing—SAE #1

Governor—Variable Speed, includes throttle controls

Heat Exchanger—Includes raw water pump and piping

Instruments—Includes ammeter, Hour-meter, tachometer, water temperature gauge, and oil pressure gauges for engine and marine gear

Lube Oil Filter—Full-flow filter

Marine Gear—Twin Disc hydraulic reverse and reduction gear, 2 to 1 ratio

Oil pan and Distribution System—Stamped oil pan for 15° inclination angle, rear sump

Starting Motor—24 volt

Water Filter—Fresh water filter with 30-gallon (113.6 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



Detroit Diesel Allison

Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London Ontario

