




215 kW Perkins Package

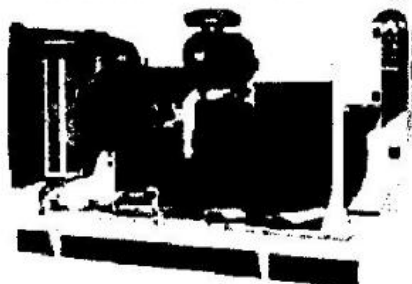

T E C H N I C A L D A T A

Engine Model :	1306-E87TA300			1500 r/min	1800 r/min
Number of Cylinders:	6 in line		Fuel Consumption 1306-E87TA300: l/hr	53.2 (14.1)	61.5 (16.2)
Cubic Capacity: Lts (cu.in)	8.7 (530)				
Bore/Stroke : mm (in)	116.6 (4.59) / 135.9 (5.35)		Heat Rejection to Exhaust System: kW (Btu/min)	124 (7066)	145 (8252)
Compression Ratio :	16.9 : 1		Heat Rejection to Cooling System: kW (Btu/min)	96 (5464)	110 (6261)
Aspiration :	Turbocharged, A/A Charge Cooled		Total Radiated Heat : kW (Btu/min)	56.5 (3216)	63.5 (3614)
Frequency :	50 Hz	60 Hz	Exhaust Temperature: °C (°F) Prime	526 (979)	477 (890)
Engine Speed :	1500 RPM	1800 RPM	Cooling Air Flow m3/min (cfm)	409 (14420)	517 (18226)
Maximum Continuous/ Prime Power at Flywheel : kW (hp)	224 (300)	242 (325)	Combustion Air Flow: m3/min (cfm)	14.9 (525)	20.2 (712)
BMEP : kPa (psi) Prime	2055 (298)	1855 (269)	Exhaust Gas Flow : m3/min (cfm)	40.3 (1424)	51.3 (1811)
Piston Speed : m/sec (ft/sec)	6.8 (22.3)	8.2 (26.9)			
Fuel Tank Capacity: Lts (UK Gal)	350 (92.5)	350 (92.5)			

Note: Standard reference conditions 0.8 p.f. 25°C (77°F) ambient, 177m (580 ft) Altitude and 40°C (104°F) Fuel Inlet Temperature. All engine performance data based on the above mentioned maximum prime ratings. Fuel consumption data at full load (100%) with diesel fuel with a specific gravity of 0.85 and conforming to BS2869:1988, Class A2.



Gold Coast Power, Inc.

Worldwide Distribution of
"New Factory Warranted"
Rebuilt & Used Diesel Engines,
Generators, Power Units, Transmissions,
Torque Converters, etc.

P.O. Box 2187
Fort Lauderdale, Florida 33303

Phone (954) 523-7007
Fax (954) 525-7007
www.goldcoastpower.com

