


## principal dimensions

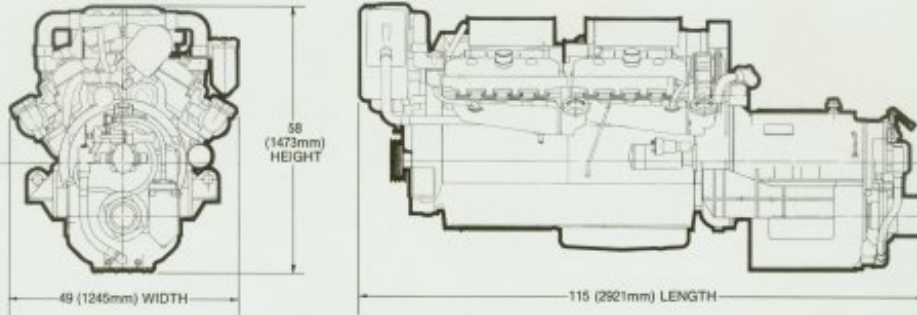

For complete dimensional information, refer to installation drawing 2SA316.

## standard equipment

### Air Inlet Housing

### Air Silencers

**Alternator**—24 volt, 50 amp

### Crankshaft Pulley

**Engine Mounts**—Includes mounts for both engine and marine gear

**Exhaust Manifold**—Water cooled

**Flywheel**—SAE #0

**Flywheel Housing**—SAE #0

**Governor**—Variable speed

**Heat Exchanger**—Includes raw water pump and piping

**Injectors**—Cam-operated, unit type, clean tip

**Instruments**—Includes ammeter, water temperature gauge, tachometer, and oil pressure gauges for both engine and marine gear

### Lube Oil Cooler

**Lube Oil Filter**—Full flow

**Marine Gear**—Twin Disc hydraulic reverse and reduction gear, 2.194 to 1 ratio

**Oil Pan**—Stamped pan for 15° inclination angle

**Starting Motor**—24 volt

**Vibration Damper**—Single, heavy, viscous

**Water Filter**—Fresh water filter with 65-gallon (246 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



**Detroit Diesel Allison**  
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London Ontario