


principal dimensions

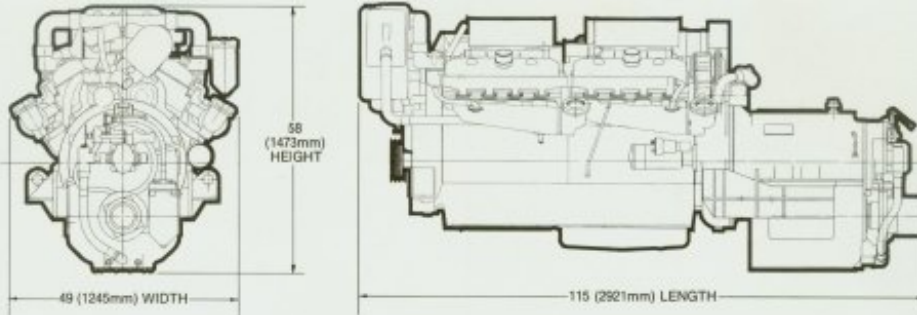

For complete dimensional information, refer to installation drawing 2SA316.

standard equipment

Air Inlet Housing

Air Silencers

Alternator—24 volt, 50 amp

Crankshaft Pulley

Engine Mounts—Includes mounts for both engine and marine gear

Exhaust Manifold—Water cooled

Flywheel—SAE #0

Flywheel Housing—SAE #0

Governor—Variable speed

Heat Exchanger—Includes raw water pump and piping

Injectors—Cam-operated, unit type, clean tip

Instruments—Includes ammeter, water temperature gauge, tachometer, and oil pressure gauges for both engine and marine gear

Lube Oil Cooler

Lube Oil Filter—Full flow

Marine Gear—Twin Disc hydraulic reverse and reduction gear, 2.194 to 1 ratio

Oil Pan—Stamped pan for 15° inclination angle

Starting Motor—24 volt

Vibration Damper—Single, heavy, viscous

Water Filter—Fresh water filter with 65-gallon (246 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



Detroit Diesel Allison
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London Ontario