BW 165 Technical data and Installation dimensions


REDUCTION	SAE HORSEPOWER (KILOWATTS)					
RATIOS CONTINUOUS MED	MEDIUM	LIG	HT	PLEASURE		
			1900 RPM	2300 RPM	1900 RPM	2300 RPM
1.111, 1.262 1.500, 1.743 1.794, 2.000 2.233, 2.593			826 (617)	1000 (747)	917 (684)	1110 (828)
3.042			702 (524)	850 (635)	779 (581)	942 (703)

POWER/SPEED RATIOS (KW/RPM)

1.111-2.593	0.3246	0.3602
3.042	0.2759	0.3058

Max./Min. engine speed limits - Diesel: 3000/500 rpm Metric Horsepower = SAE Horsepower x 1.014 approx. dry weight*: 265 kg (583 lbs) approx. oil capacity: 20 liter (21.2 qt)

* with SAE 1 bell housing

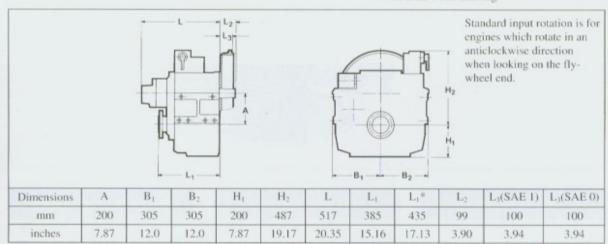

* " with trailing pump

TORSIONAL RESPONSIBILITY:

The responsibility for ensuring torsional compatibility rests with the assembler of the drive and driven equipment.

ZF can accept no liability for gearbox noise caused by vibrations or for damage to the gearbox, the flexible coupling or to other parts of the drive unit caused by this kind of vibration. Contact ZF for further information and assistance.

Ratings apply to marine transmissions currently in production and are subject to change without prior notice

SAFE OPERATION NOTICE:

The safe operation of ZF products depends upon adherence to technical data presented in our brochures. Safe operation also depends upon proper installation, operation and routine maintenance and inspection under prevailing conditions and recommendations set forth by ZF. Damage to transmissions caused by repeated or continuous emergency manoeuvres or abnormal operation is not covered under warranty. It is the responsibility of users and not ZF to provide and install guards and safety devices which may be required by recognized safety standards of the respective country (e.g. for U.S.A. - the Occupational Safety Act of 1970 and its subsequent provisions).

Subject to technical change without notice. For installation purposes, please request installation drawings.

ZF Friedrichshafen AG	ZF - MPM Via Penghe 48	ZF Industries, Inc. Marine Div. 777 Hickory Hill Dr.	
D-88038 Friedrichshafen	1-35 030 Caselle di Selvazzano		
Germany	Padova, Italy	U.S.A.	
Phone (0.75.41) 77-0	Phone (049) 8299-311	Phone (708) 634-3500	
Fax (0.75.41) 77-5942	Fax (049) 8299-550	Fax (708) 913-1039	